

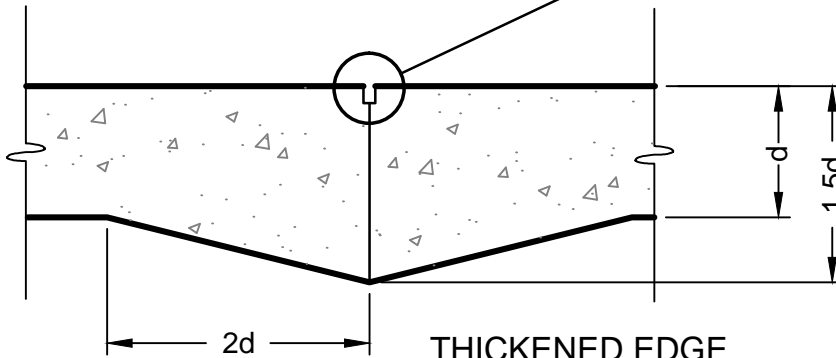


KEYED CONSTRUCTION JOINT

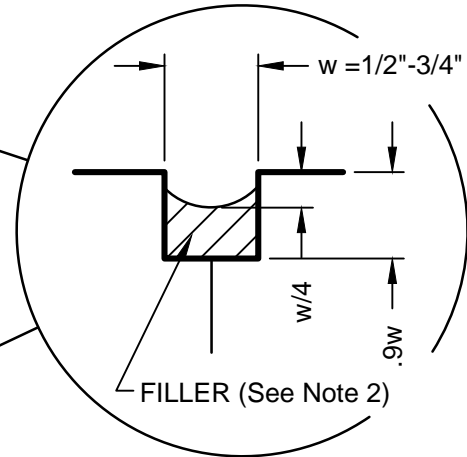


THICKENED EDGE CONSTRUCTION JOINT

d = Depth of Concrete

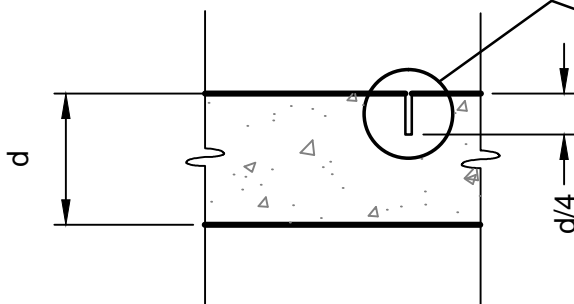

CONTROL JOINT

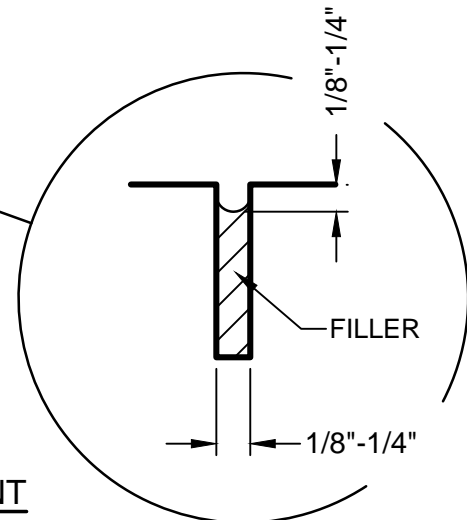

NOTES:

1. Control joints may be tooled, impressed, or sawn.
2. Sawn or open tooled joints shall be filled with approved elastomeric filler.

P:\Engr & CAD\STANDARD DWGS - ALL YEARS\Std Dwgs 2014\Concrete Pavement Joints 4.dwg

dwc 3-00
DRR

CONCRETE PAVEMENT JOINT ALTERNATIVES

PAGE NO:

4

CITY OF PULLMAN
ENGINEERING DIVISION

ADOPTED: 12-09-2014